


ACO Drain

MiniKlassik

Introduction to the MiniKlassik System  
M50K - 50 mm internal width, mini trench drain

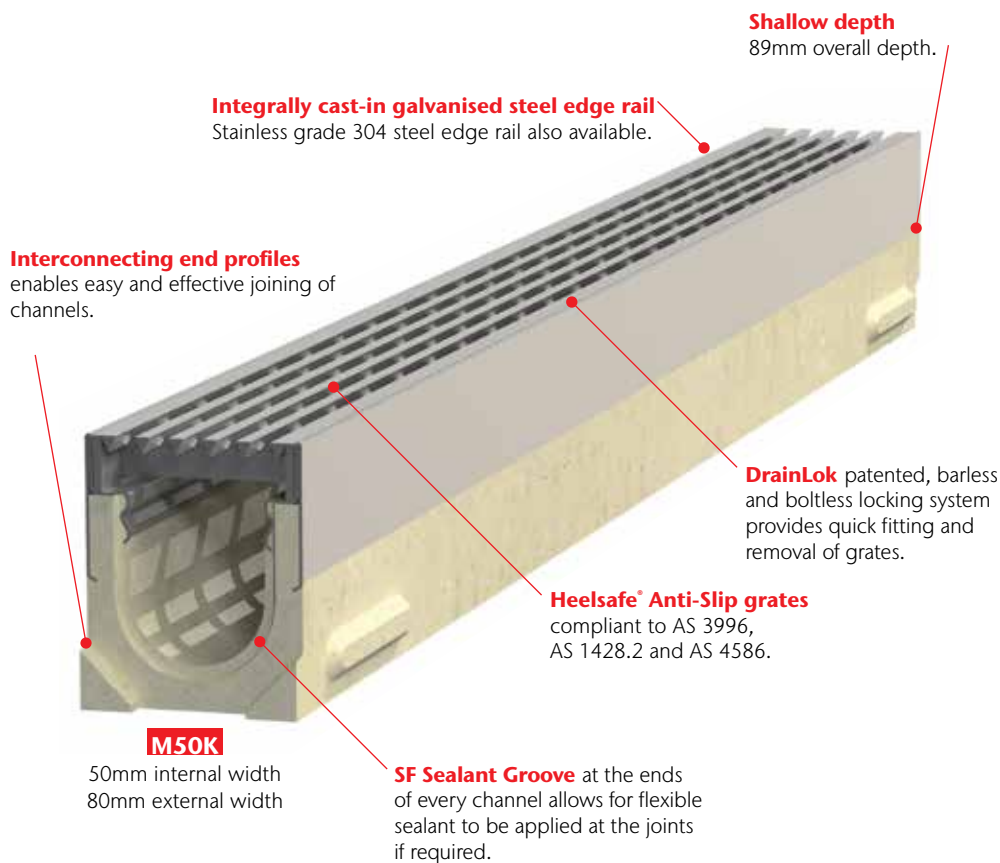

**MiniKlassik** is a compact trench drainage system for high profile, small-scale projects where a barrier is required to separate wet and dry areas. A choice of **Heelsafe®** Anti-Slip grates are available in stainless steel and ductile iron.

## Parts Table

Channels	Part No.		Invert <sup>1</sup> mm	Weight kg
	Galv	S/S		
Neutral channel (1m)	04071	06750	74	8.2
End cap		95403	89 <sup>1</sup>	0.1
Grate removal tool		01318	–	0.1

### Notes:

- For overall depth add 15mm to invert depth.
- Preformed 38mm dia. drill-out to underside of channel.
- MiniKlassik does not fit with any ACO pit - discharge via vertical outlet only.
- Overall depth of end cap.

## DrainLok grates

	Length mm	Part No.	Wgt kg				
<b>LOAD CLASS B – AS 3996 – 80kN – approximate wheel load 2,670kg</b>							
	Type 243D Stainless 5 Star <sup>1</sup> Heelsafe® Anti-Slip	1000	142227	2.3	✓	✓	✓
<b>LOAD CLASS D – AS 3996 – 210kN – approximate wheel load 8,000kg</b>							
	Type 276D Iron Intercept <sup>1</sup> Heelsafe® Anti-Slip	500	138107	3.3	✓	✓	✓

1. Meets ASME A112.6.3 Section 7.12 (American high heel standard).

## Heelsafe® Anti-Slip grates



ACO believes that pedestrian friendly grates and slip resistance go hand in hand. The grates with the trademark, Heelsafe® Anti-Slip comply to AS 3996, AS 4586 and all the specific user requirements described below. For more information visit [www.heelsafe.co.nz](http://www.heelsafe.co.nz)

## Specific user requirements

ACO's grates meet some or all of the legislative requirements described below:

- Wheelchair compliant to AS 1428.2, Clause 9(c). Slots cannot exceed 13mm (width), 150mm (length). Longitudinal grates are to be placed at right angles to the principal direction of travel.
- Grates designed to resist the penetration of a 10mm heel.
- Bicycle tyre penetration resistant to AS 3996. Criteria on slot length dependant on slot width.
- Pedestrian safe grates with slip resistance, rated to AS 4586.

ACO Limited

[acodrain.co.nz](http://acodrain.co.nz)  
[info@aconz.co.nz](mailto:info@aconz.co.nz)

Unit F  
6 Percival Gull Place  
Mangere, Auckland 2022  
New Zealand  
Tel: +64 (0)9 815 9500  
Toll Free: (800) 448 080  
Fax: +64 (0) 9 255 5114

© 2019 ACO Limited. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Limited pursues a policy of continuous product development and reserves the right to amend specifications without notice.

ACO. creating  
the future of drainage



LE0031  
(2019 – 3000)