




This grate is part of ACO's Heelsafe® Anti-Slip range. For more information visit www.heelsafe.com.au

Product Features

- Certified to AS 3996 Load Class B (80kN) (NATA endorsed load test reports available)
 - AS 3996 (Clause 3.3.5) compliant for surface openings in pedestrian areas
ASME A112.6.3 (Section 7.12) compliant - American high heel standard
 - AS 4586: P4 – Slip resistance classification for Wet Pendulum Test
AS 4586: C/C¹ – Slip resistance classification for Wet-Barefoot Inclining Platform Test
AS 4586: R11/R11¹ - Slip resistance classification for Oil-Wet Inclining Platform Test
 - AS 1428.2 (Clause 9c) compliant for wheelchair and walking cane safety
 - AS 3996 (Clause 3.3.6) compliant for bicycle tyre penetration resistance
 - Discrete raised mechanical nodes for tread durability
 - No end bars for visual continuity
 - Suitable for use with M100K, M100KS channels
 - Manufactured from Grade 304 stainless steel
- ¹ Test direction (perpendicular/parallel) relative to the grate's length (NATA endorsed test reports available)

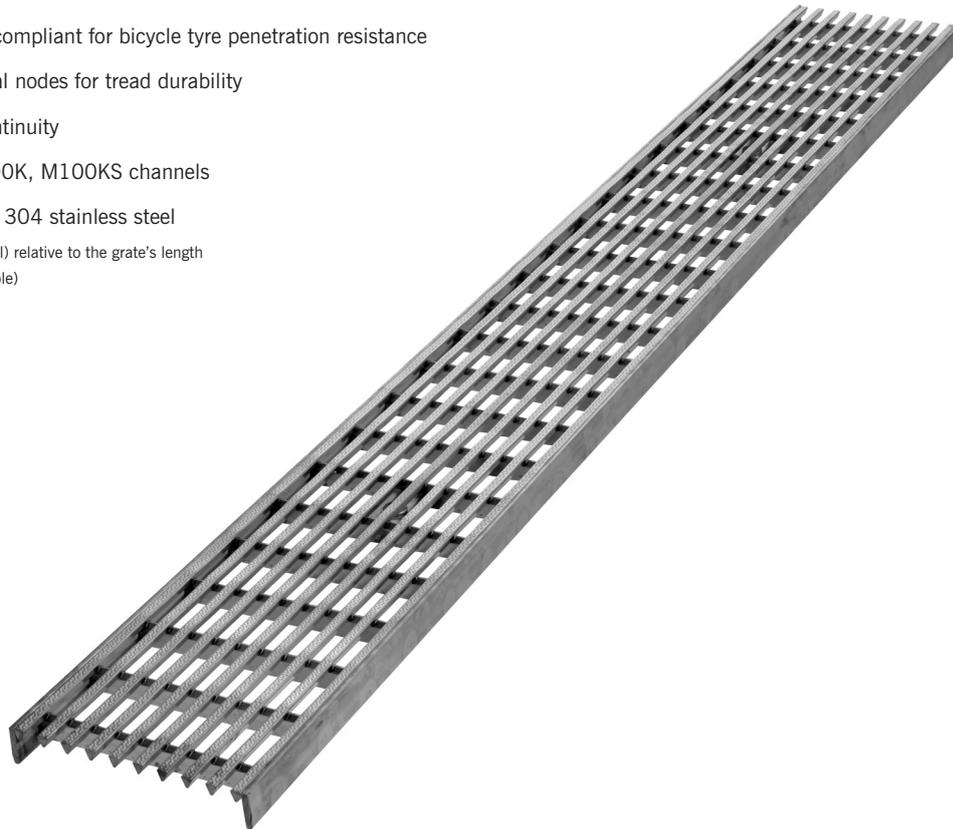

Specifications

The grate shall be ACO M100K/M100KS Stainless 5 Star Heelsafe® Anti-Slip grate as manufactured by ACO. This grate has an overall width of 123mm and overall length of 1000mm. Slot widths measure at a maximum of 6mm.

Materials & Design

The grate shall be manufactured from stainless steel and have **minimum** properties and characteristics as follows:

- Raised mechanical nodes for tread durability
- No end bars for visual continuity
- Manufactured from Grade 304 stainless steel
- Certified to AS 3996 Load Class B (80kN)²
- AS 4586: P4 – Slip resistance classification for Wet Pendulum Test²
- AS 4586: C/C¹ – Slip resistance classification for Wet-Barefoot Inclining Platform Test²
- AS 4586: R11/R11¹ – Slip resistance classification for Oil-Wet Inclining Platform Test²
- Meets AS 1428.2 (Clause 9c); AS 3996 (Clause 3.3.5 & 3.3.6); ASME A112.6.3 (Section 7.12)
- Intake area of 60,480mm² per metre of grate

¹ Test direction (perpendicular/parallel) relative to the grate's length

² NATA endorsed test reports available

For the specification of the ACO Drain channel system selected, click: <http://www.acodrain.com.au/resources>

ACO Specification Information




ACO DRAIN®

M100K/M100KS Stainless 5 Star Heelsafe® Anti-Slip grate



Plan view

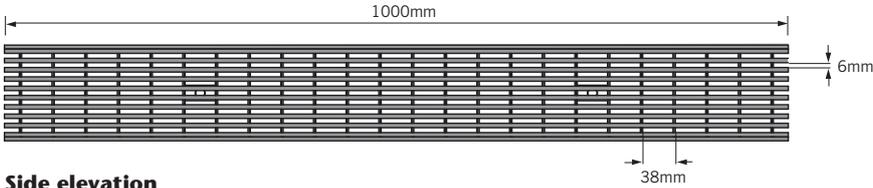

Side elevation



Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
Non locking grate				
M100K/M100KS Stainless 5 Star Heelsafe® Anti-Slip	141806	1000	123	3.2
Grate removal tool	01318	-	-	0.1

ACO Polycrete Pty Ltd
Australia

Ph: 1300 765 226
www.acodrain.com.au
sales@acoaus.com.au

ACO Limited
New Zealand

Ph: 0800 448 080
www.acodrain.co.nz
sales@aconz.co.nz



© March, 2014 ACO Polycrete Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Polycrete Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.