

Product Features

Certified to AS 3996 Load Class D (210kN)
(NATA endorsed load test reports available)



AS 1428.2 (Clause 9c) compliant for wheelchair and walking cane safety



AS 3996 (Clause 3.3.6) compliant for bicycle tyre penetration resistance

- Recesses in the edge rail fit around 'anti-shunt' lugs on the grate to prevent longitudinal movement
- **DrainLok** barless and boltless locking system
- Suitable for use with K300, KS300, H300K, H300KS channels
- Manufactured from ductile iron to AS 1831 Grade 500-7

**Specifications**

The grate shall be ACO Type 860D Iron Slotted grate with **DrainLok** barless and boltless locking system as manufactured by ACO. This grate has an overall width of 338mm and overall length of 500mm. Slot widths measure at a maximum of 10mm.

Materials & Design

The grate shall be manufactured from ductile iron and have **minimum** properties and characteristics as follows:

- Recesses in the edge rail fit around 'anti-shunt' lugs on the grate to prevent longitudinal movement
- Manufactured from ductile iron to AS 1831 Grade 500-7
- Certified to AS 3996 Load Class D (210kN)¹
- Meets AS 1428.2 (Clause 9c); AS 3996 (Clause 3.3.6)
- Intake area of 67,160mm² per half metre of grate

¹ NATA endorsed test reports available


For the specification of the ACO Drain channel system selected, click: <http://www.acodrain.com.au/resources>

ACO DRAIN®



Type 860D Iron Slotted grate



Plan view

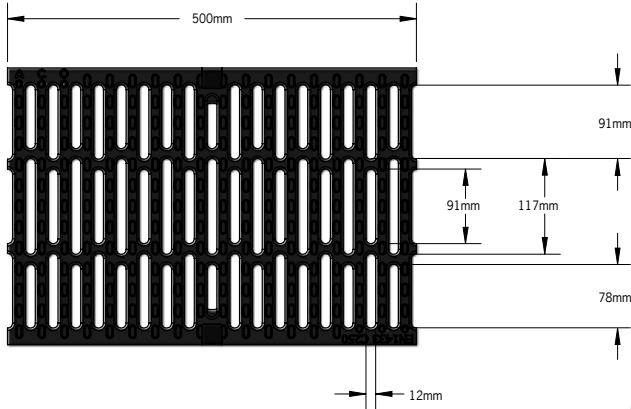


Side elevation

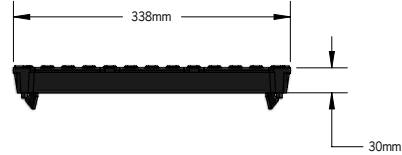

Description	Part No.	Length (mm)	Width (mm)	Weight (kg)
DrainLok grate				
Type 860D Iron Slotted	13870	500	338	19.0
Grate removal tool	01318	-	-	0.1

'DrainLok' locking mechanism



ACO **DrainLok™** is a patented, boltless locking system that removes the need for bolts and bars and improves the hydraulic capacity of the channel. The **DrainLok™** mechanism simply clips into the channel edge rail for rapid installation. ACO **DrainLok™** grates are fitted with an anti-shunt mechanism that restricts unwanted grate movement when installed, improving durability and longevity of the system.

ACO Pty Ltd
Australia
Ph: 1300 765 226
www.acodrain.com.au
sales@acoaus.com.au

ACO Limited
New Zealand
Ph: 0800 448 080
www.acodrain.co.nz
sales@aconz.co.nz



© October 2017 ACO Pty Ltd. All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions are suitable. ACO Polycrete Pty Ltd. pursues a policy of continuous product development and reserves the right to amend specifications without notice.